


TECHNICAL SPECIFICATIONS

1 - ERGOPOWER EPS


RIGHT CONTROL LEVER		
BRAKE CASINGS:	Ø 4.9 mm Campagnolo	
BRAKE CABLE:	Ø 1.6 mm Campagnolo	

LEFT CONTROL LEVER		
BRAKE CASINGS:	Ø 4.9 mm Campagnolo	
BRAKE CABLE:	Ø 1.6 mm Campagnolo	


2 - EPS FRONT DERAILLEUR

11s FRONT DERAILLEUR		
CAPACITY (TEETH):	16	
MAX CHAINRING (TEETH):	55	
CHAIN LINE	43,5 mm	
CHAINSTAY ANGLE	61° - 66°	

3 - EPS REAR DERAILLEUR

11s REAR DERAILLEUR		
CAPACITY (TEETH):	33	
SPROCKET MAX (TEETH):	29	
SPROCKET MIN (TEETH):	11	
CHAINRING FRONT DIFFERENCE (TEETH):	16	


4 - POWER UNIT

BATTERY	ion lithium	
NOMINAL CAPACITY	950 mAh	
OPERATING TEMPERATURE RANGE	Discharging: -10°C / + 60°C	
	Charging: 0°C / + 45°C	
STORAGE TEMPERATURE RANGE	-20°C / + 60°C	
NOMINAL VOLTAGE	11,1 Vdc	

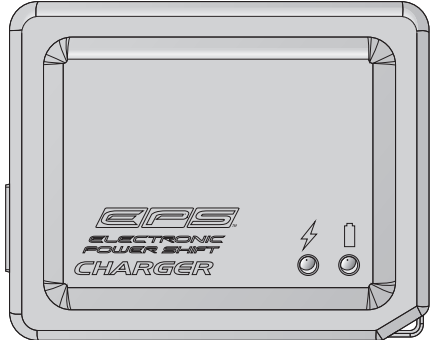
! DANGER!

Failure to observe these instructions may cause overheating, fire or explosion and result in severe injury or death.

5 - INTERFACE

INTERFACE		
OPERATING TEMPERATURE	-10°C / + 60°C	
STORAGE TEMPERATURE	-20°C / + 85°C	
NOMINAL VOLTAGE	11,1 Vdc	

6 - BATTERY CHARGER

BATTERY CHARGER TYPE	Automatic Mode Switching	
POWER SUPPLY	mains: 120 – 240 Vac, 50 – 60 Hz	
	vehicle socket: 12Vdc	
OUTPUT	12,6V	
CHARGING CURRENT	600mA max	
OPERATING TEMPERATURE	-10°C to +40°C	
STORAGE TEMPERATURE	-20°C to +85°C	
DIMENSIONS	106 x 84 x 35 (L x W x H)	