

# EPS V2 / V3 TECHNICAL SPECIFICATIONS

## 1 - ERGOPOWER EPS

### RIGHT CONTROL LEVER

BRAKE CASINGS:

Ø 4.9 mm Campagnolo

BRAKE CABLE:

Ø 1.6 mm Campagnolo



### LEFT CONTROL LEVER

BRAKE CASINGS:

Ø 4.9 mm Campagnolo

BRAKE CABLE:

Ø 1.6 mm Campagnolo



## 2 - EPS FRONT DERAILLEUR

### FRONT DERAILLEUR

CAPACITY (TEETH):

16

MAX CHAINRING (TEETH):

55

CHAIN LINE:

43,5 mm

CHAINSTAY ANGLE:

63° - 66°



## 3 - EPS REAR DERAILLEUR

### REAR DERAILLEUR

CAPACITY (TEETH):

33

SPROCKET MAX (TEETH):

29

SPROCKET MIN (TEETH):


11

CHAINRING FRONT DIFFERENCE (TEETH):

16




## 4 - POWER UNIT V2

<b>BATTERY</b>	ion lithium	
NOMINAL CAPACITY:	720 mAh	
OPERATING TEMPERATURE RANGE:	Discharging: -20°C / + 60°C	
	Charging: 0°C / + 45°C	
STORAGE TEMPERATURE RANGE:	-20°C / + 60°C	
NOMINAL VOLTAGE :	10,8 V	

### DANGER!

Failure to observe these instructions may cause overheating, fire or explosion and result in severe injury or death.


## 4.1 - POWER UNIT V3

<b>BATTERY</b>	ion lithium	
NOMINAL CAPACITY:	720 mAh	
OPERATING TEMPERATURE RANGE:	Discharging: -20°C / + 60°C	
	Charging: 0°C / + 45°C	
STORAGE TEMPERATURE RANGE:	-20°C / + 60°C	
NOMINAL VOLTAGE :	10,8 V	


### DANGER!

Failure to observe these instructions may cause overheating, fire or explosion and result in severe injury or death.

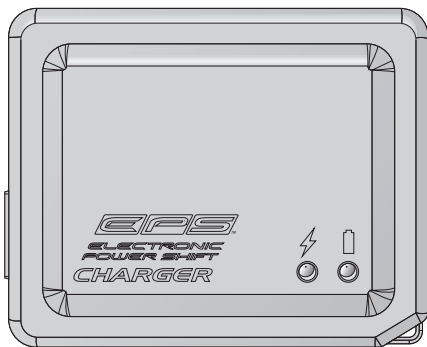
## 5 - INTERFACE UNIT V2

INTERFACE UNIT V2		
OPERATING TEMPERATURE:	-20°C / + 60°C	
STORAGE TEMPERATURE:	-20°C / + 85°C	
NOMINAL VOLTAGE :	11,1 Vdc	

## 5.1 - INTERFACE UNIT V3

INTERFACE UNIT V3		
OPERATING TEMPERATURE:	-20°C / + 60°C	
STORAGE TEMPERATURE:	-20°C / + 85°C	
NOMINAL VOLTAGE :	11,1 Vdc	

## 6 - BATTERY CHARGER for POWER UNIT V2 / V3

TYPE OF BATTERY CHARGER		
	Automatic Mode Switching	
POWER SUPPLY:	mains: 120 – 240 Vac, 50 – 60 Hz vehicle socket: 12Vdc	
OUTPUT:	12,6V	
CHARGING CURRENT:	500mA max	
OPERATING TEMPERATURE:	da 0°C a +45°C	
STORAGE TEMPERATURE:	da -20°C a +85°C	
DIMENSIONS:	106 x 84 x 35 (L x L x A)	